


OMRON



Regulation

GMP HACCP

realizing

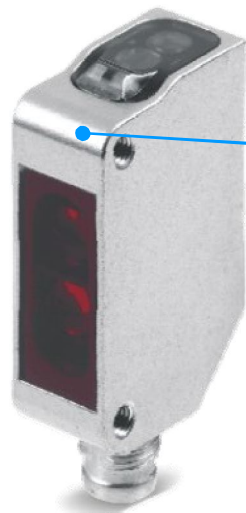

Partially or completely smooth housings with rounded edges

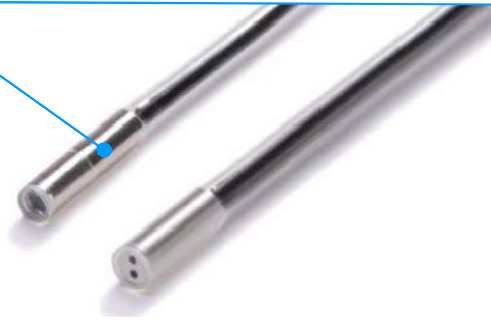

Waterproofing ring: Fluorine rubber

Excellent resistance to detergents and disinfectants.

Optical plate: Methacrylic resin (PMMA)

Excellent resistance to detergents and disinfectants. High transparency and other qualities give PMMA excellent optical characteristics.

Seal

The seal provides the resistance to high temperature and high pressure water that complies with IP6K.

Indicator cover: Polyether Sulfone (PES)

Excellent resistance to detergents and disinfectants.

Sensitivity adjustment and operation switch: Polyether etherketone (PEEK)

Excellent resistance to detergents and disinfectants. Also has excellent abrasion resistance.

Case: SUS316L

Excellent corrosion resistance to many chemical reagents.

Cable: Vinyl chloride

Excellent resistance to detergents and disinfectants.

Changing of annex 1 Article 121

121. “Vials with missing or displaced stoppers should be rejected prior to chapping. Where human intervention is required at the chapping station, appropriate technology Should be used to prevent direct contact with the vials ans to minimise microbial contamination”





Omron Europe B.V.

Wegalaan 67-69, NL-2132 JD, Hoofddorp, The Netherlands.

Tel: +31 (0) 23 568 13 00 Fax: +31 (0) 23 568 13 88

industrial.omron.eu

A decorative graphic at the bottom of the page features overlapping, wavy blue lines and a grid pattern, creating a sense of motion and technology.

realizing